

Cable and rope support stockings

>> RP- 700-H



The lighter weaving of these stockings makes them easy to handle. Nevertheless, they are the safest and most efficient fastening medium for free-hanging cables and ropes. In switching cabinets, antenna systems, transformers, machinery of lift system, the strain-relief and stress-free suspension with no risk of lead breaks with the two pressed-on flexible eyelets is the best choice. Forget conventional clamp and bracket fastening; make use of the better system.



(1-layered / standard)



(2-layered / enhanced)


RP-700-H: Available in standard lengths 200 mm to 500 mm. Other lengths upon request!
Also available in the following design:

>> **STAINLESS STEEL (STAINLESS STEEL BRAIDING)**

>> **STRAINED BOWDEN CABLE**

>> **STAINLESS STEEL REINFORCED** (three-layer design for higher tensile strength)

>> **PLASTIC COATED STRANDS**

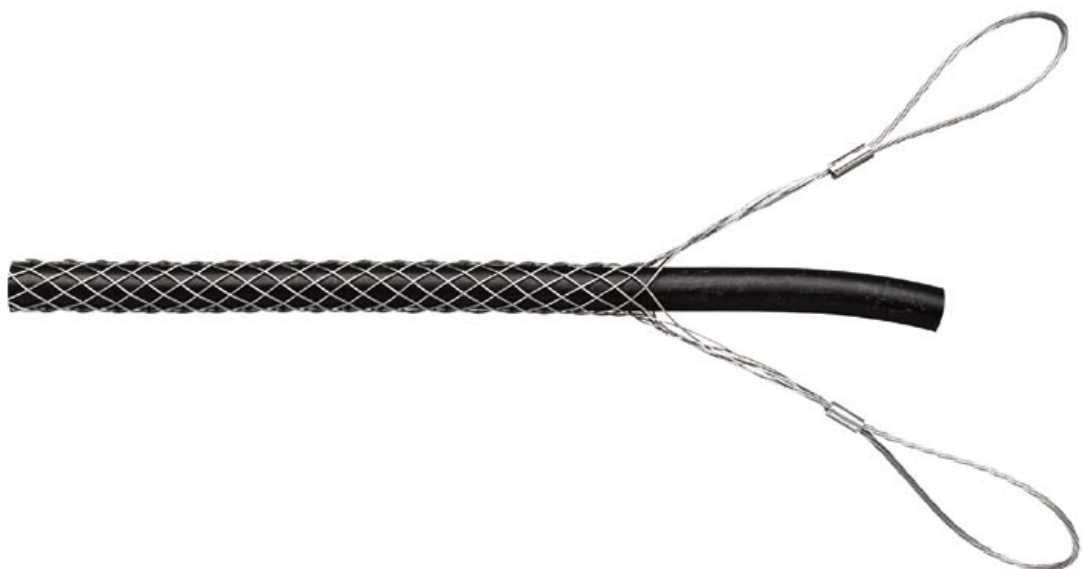



"RUPI CABLE- AND WIRE STOCKINGS,
SIMPLY BRILLIANT AND INDISPENSABLE"

RUPI-COLOGNE[®] GMBH

YOUR SPECIALIST AROUND CABLE AND WIRE

Cable and rope support stockings

>> RP- 700-H

For cables and ropes with \varnothing from - to	Permissible tension load in kN / tons approx.	Thimble size for bolt \varnothing approx. mm	Braiding / total length approx. mm	Part number
08 - 15 mm	2,56 / 0,26	flexible rope eyelets	200 / 300	RP - 710-H
15 - 20 mm	2,87 / 0,29	flexible rope eyelets	200 / 300	RP - 715-H
20 - 30 mm	3,20 / 0,33	flexible rope eyelets	350 / 500	RP - 720-H
30 - 40 mm	4,48 / 0,46	flexible rope eyelets	350 / 500	RP - 730-H
40 - 50 mm	6,24 / 0,64	flexible rope eyelets	500 / 700	RP - 740-H
50 - 60 mm	6,93 / 0,71	flexible rope eyelets	500 / 700	RP - 750-H



**Greater loads and higher tensile forces
and special designs on request.
Produceable immediately.**

rupi-Cologne, GmbH

Industriestr. 30-32
„Einfahrt Siemensstraße“
67269 Grünstadt
Germany

Phone + Fax

+49(0)2234-95395- 0
+49(0)2234-95395- 22

E-mail + Web

info@rupi-cologne.de
www.rupi-cologne.de